

TECHNICAL DATA SHEET FOR Gas Cooktop / Griddle 900mm C9D, C9C, C9B, C9A



- 900mm wide
- Stainless steel finish
- 22MJ burners
- Cast iron burners and vitreous enamel pot stands
- 2, 4 or 6 open burner configuration
- Griddle options – 300mm, 600mm, and 900mm machine finished 12mm thickness, with piezo ignition
- Open cabinet base for extra storage
- Adjustable front feet and rear rollers
- Fully modular
- Optional: Flame failure protection on open burners

Overall Construction

Cast iron open burner heads with vitreous enamelled cast iron caps
 Vitreous enamelled potstands
 12mm machined surface mild steel griddle plates
 Stainless steel front, sides and splashback
 Stainless steel cabinet interior base
 Aluminised steel spill tray
 Griddle sections are standard on RH side only.
 50mm dia. stainless steel adjustable legs to front and two rollers at rear

Controls

Large easy use control knobs
 Variable high to low controls to open and griddle burners
 Optional flame failure on open burners
 Griddles standard with pilot, flame failure and piezo ignition

Cleaning and Servicing

Easy clean stainless steel exterior
 Vitreous enamelled potstands and burner caps
 Lift off open burner caps and removable burners
 Removable spill trays
 Stainless steel grease trays on griddles
 Access to all parts from front of unit

TECHNICAL DATA SHEET FOR Gas Cooktop / Griddle 900mm C9D, C9C, C9B, C9A

Burners

Open Burners;
22MJ/hr, 5.5kW each
Griddle Burners;
20MJ/hr, 5.0kW per 300mm section

Gas power

C9D 132MJ/hr, 33kW
C9C 108 MJ/hr, 27kW
C9B 84MJ/hr, 21kW
C9A 60MJ/hr, 15kW

Gas connection

R³/₄ (BSP) male
130mm from RH side, 20mm from
rear, and 655mm from floor

*All units supplied with Natural and
LP gas regulator*

Dimensions

Width 900mm
Depth 800mm
Height 915mm
Incl. splashback 1085mm


Packing data

1.02m³
Width 940mm
Depth 865mm
Height 1255mm
100kg nett weight
165kg packed weight


Gas types

Available in Natural gas and LP gas,
please specify when ordering

Other gas types on request

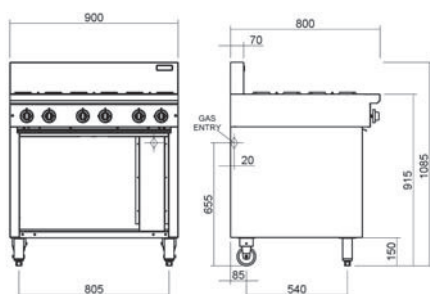

C9

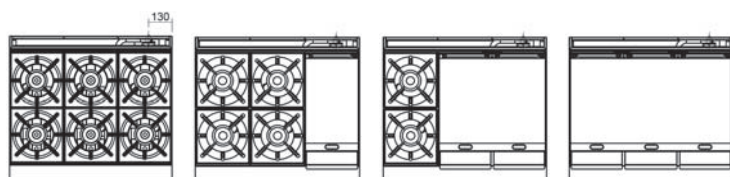

C9D

C9C

C9B

C9A

MOFFAT®

www.moffat.com.au

Australia
Moffat Pty Limited

Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Ph 03-9518 3888
Fax 03-9518 3833
vsales@moffat.com.au
www.moffat.com.au

New South Wales
Ph 02-8833 4111
nswsales@moffat.com.au

South Australia
Ph 03-9518 3888
vsales@moffat.com.au

Queensland
Ph 07-3630 8600
qldsales@moffat.com.au

Western Australia
Ph 08-9202 6820
bgarcia@moffat.com.au

New Zealand
Moffat Limited

Christchurch
16 Osborne Street
Christchurch 8011
Ph +64 3-389 1007
Fax +64 3-389 1276

Auckland
Ph +64 9-574 3150

export@moffat.co.nz
www.moffat.co.nz



ISO9001
Quality
Management
Standard

Designed and manufactured by



ISO9001

All Cobra products are designed and
manufactured by Moffat using the
internationally recognised ISO9001
quality management system, covering
design, manufacture and final
inspection, ensuring consistent high
quality at all times.



Australian
Gas Association
Approved

In line with policy to continually develop
and improve its products, Moffat Limited
reserves the right to change
specifications and design without notice.